




Cut-view [A-A] - [1:1]:

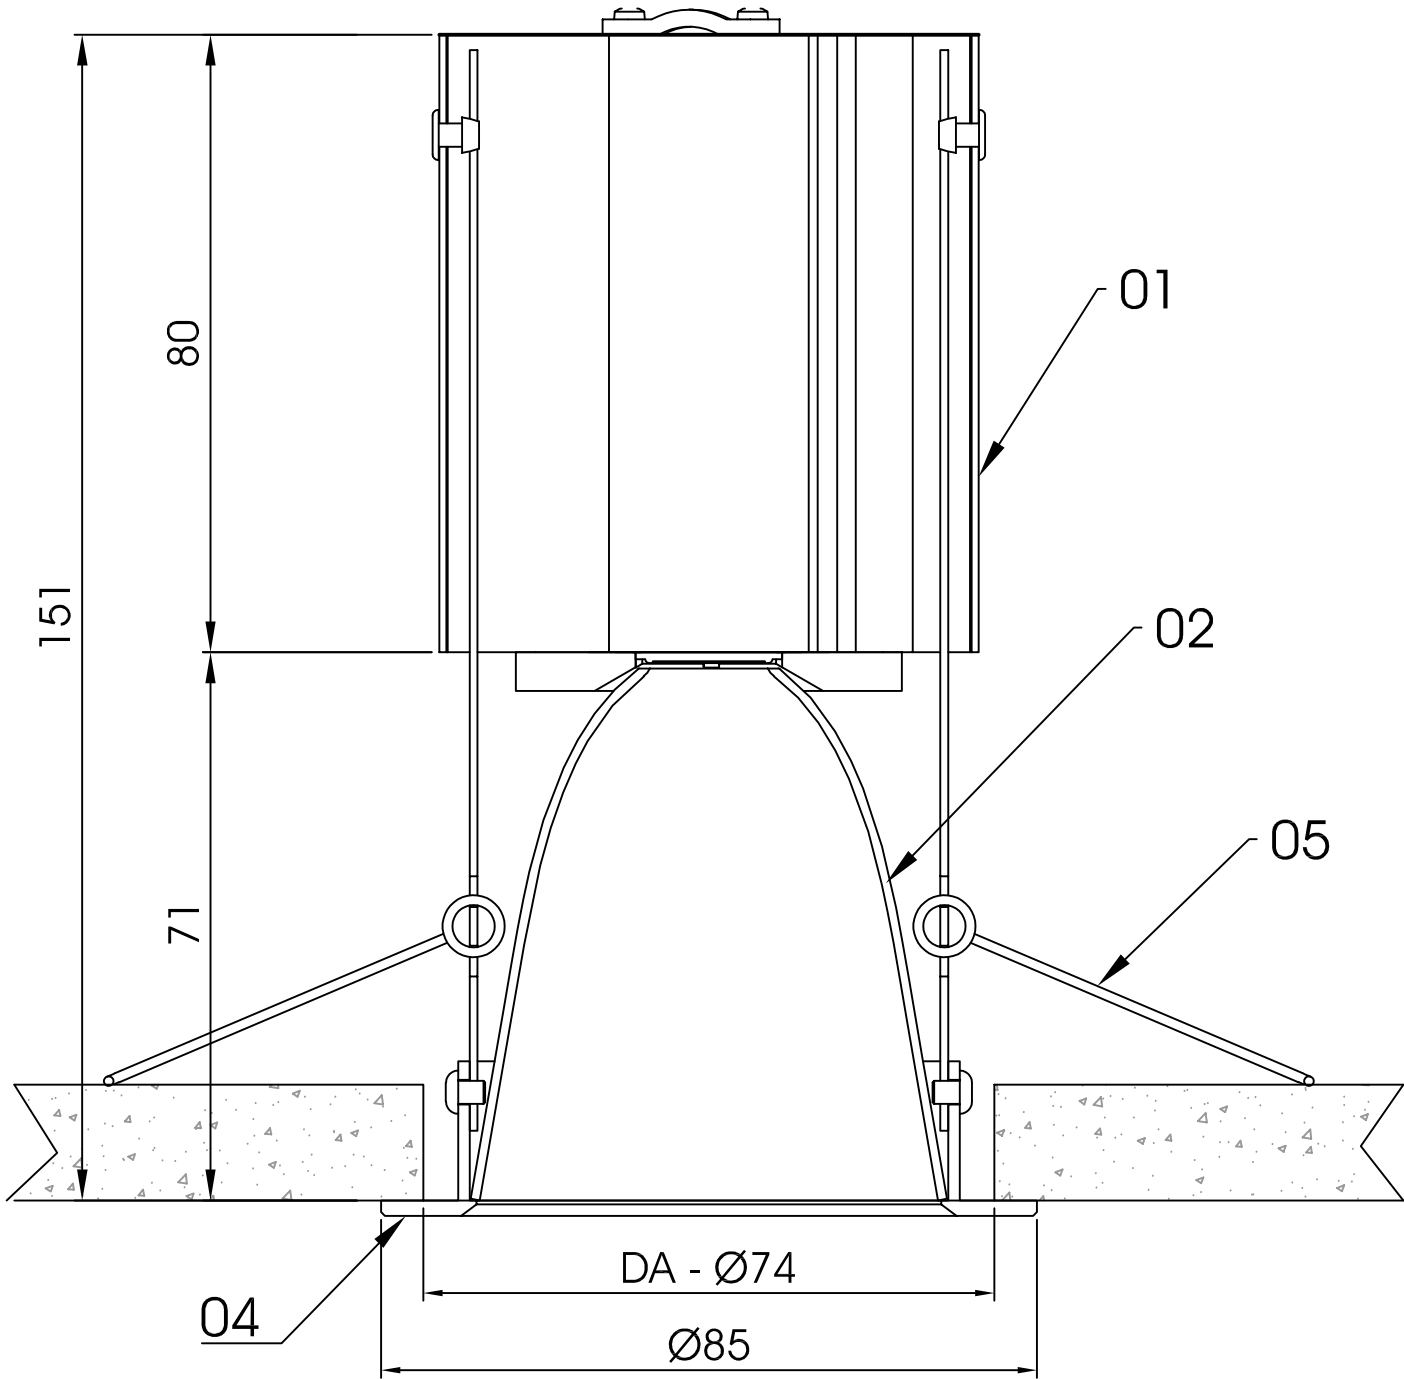

Top-down-view [1:1]:

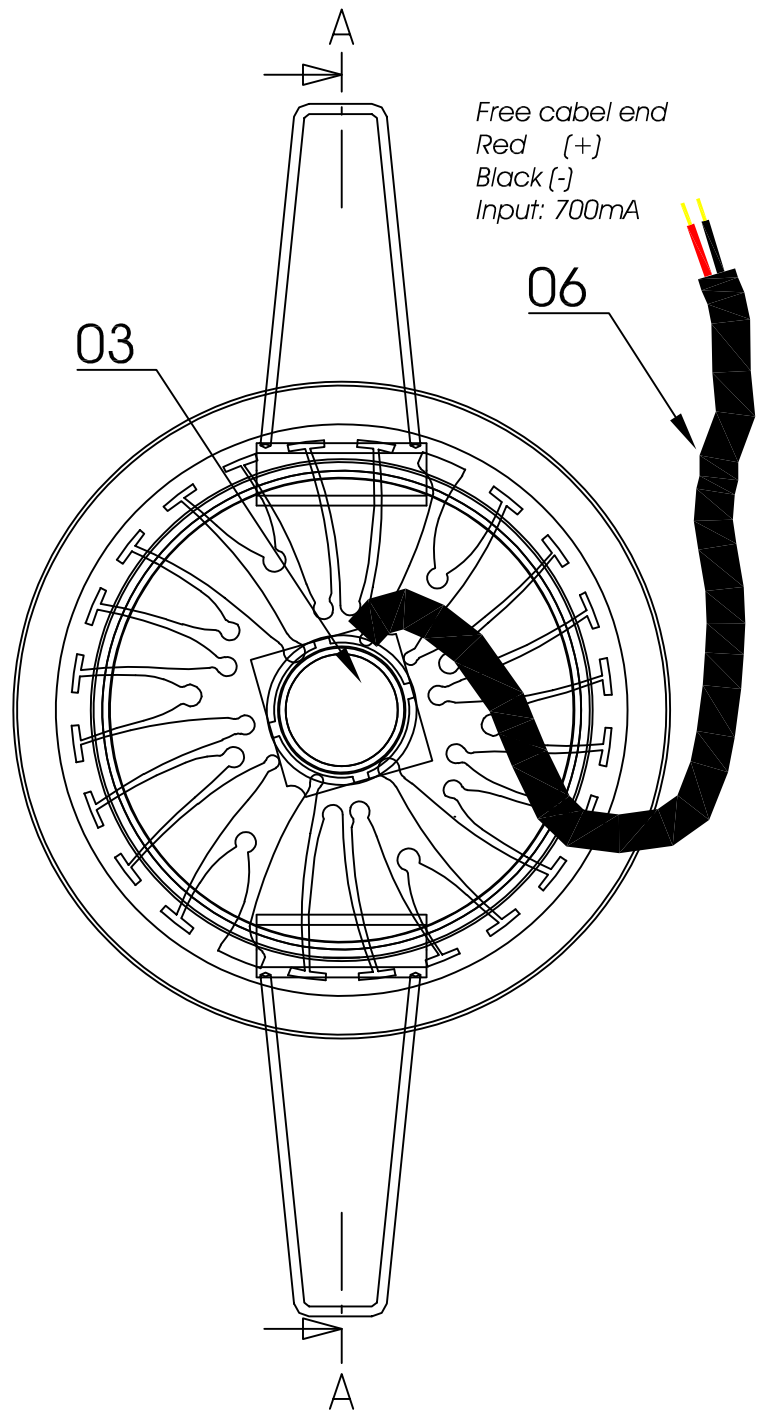

3D-view:

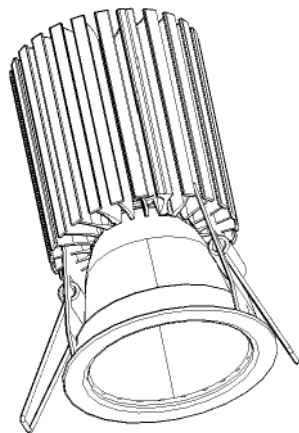

Punteo J085 | for gypsum cardboard

Surface: Aluminium, precision turned
Light distribution: 2 x 20 ° [1/10]

LED :
3000 K | 3012 lm | CRI > 80 | ~ 25W | 700 mA | 36V

Dimension Punteo Ø x H [mm]: 85 x 151
Ceiling cut-out Ø x H [mm]: 74 x 165
Protection system: IP 20 | Protection class II*
Ambient temperature: < 35°C


Electrical connection:
300 mm with free cabel end to be accommodated in the
ceiling cavity next to the lamp for connection to LED drivers

*Standard-driver [separate item]:
LVG700-030-02-03 - DALI dimmable

Light distribution curve [ldc]:



01	Heatsink - black
02	Reflector, aluminium highly specular
03	LED-Array
04	Cover ring, aluminium precision turned
05	Mounting springs
06	Cable to LED-driver, L = 300mm
07	LED-driver - DALI dimmable *
08	Plasterboard ceiling

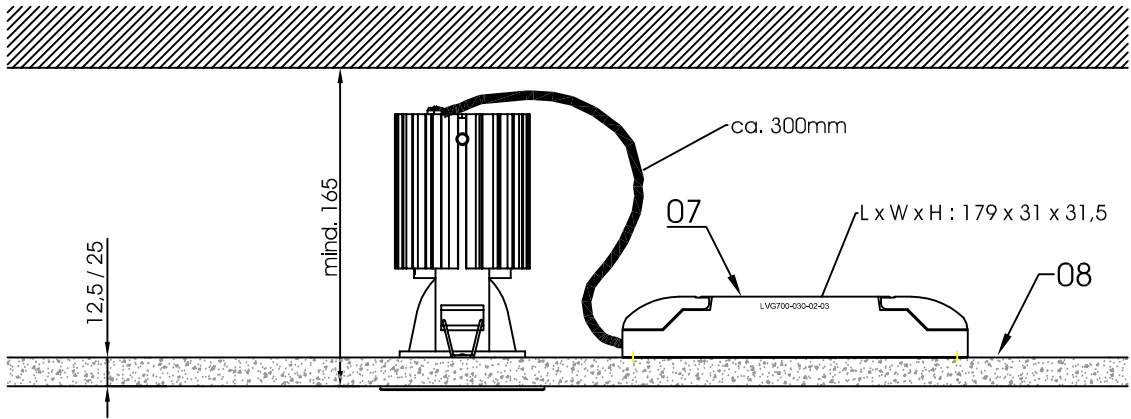Mounting situation [1:4]:



Released for production

Please refer to the general instructions for the operation

 DIN EN ISO 9001 certified Qualitätsmanagement nach DIN EN ISO 9001 reguliert 1701 102 853		Product : Point - Line - Plane Punteo J085 durlum technical documents		 durlum GmbH Am der Weide 5 79650 Schopfheim Germany E-mail : info@durlum.de Fax : +49 7622 3905-42	
Date	Name	Punteo J 085 25 W LED Pun J085-025-N3-03			
16.04.2015	FB / AF/ FF				
A3	Layer	d1 2 3 4 5 6 7	F-Pun J085-025-N3-03		

This drawing is passed on with all rights reserved to durlum, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited!
durlum GmbH, Schopfheim, Germany