




Cut-view [A-A] - [1:1]:

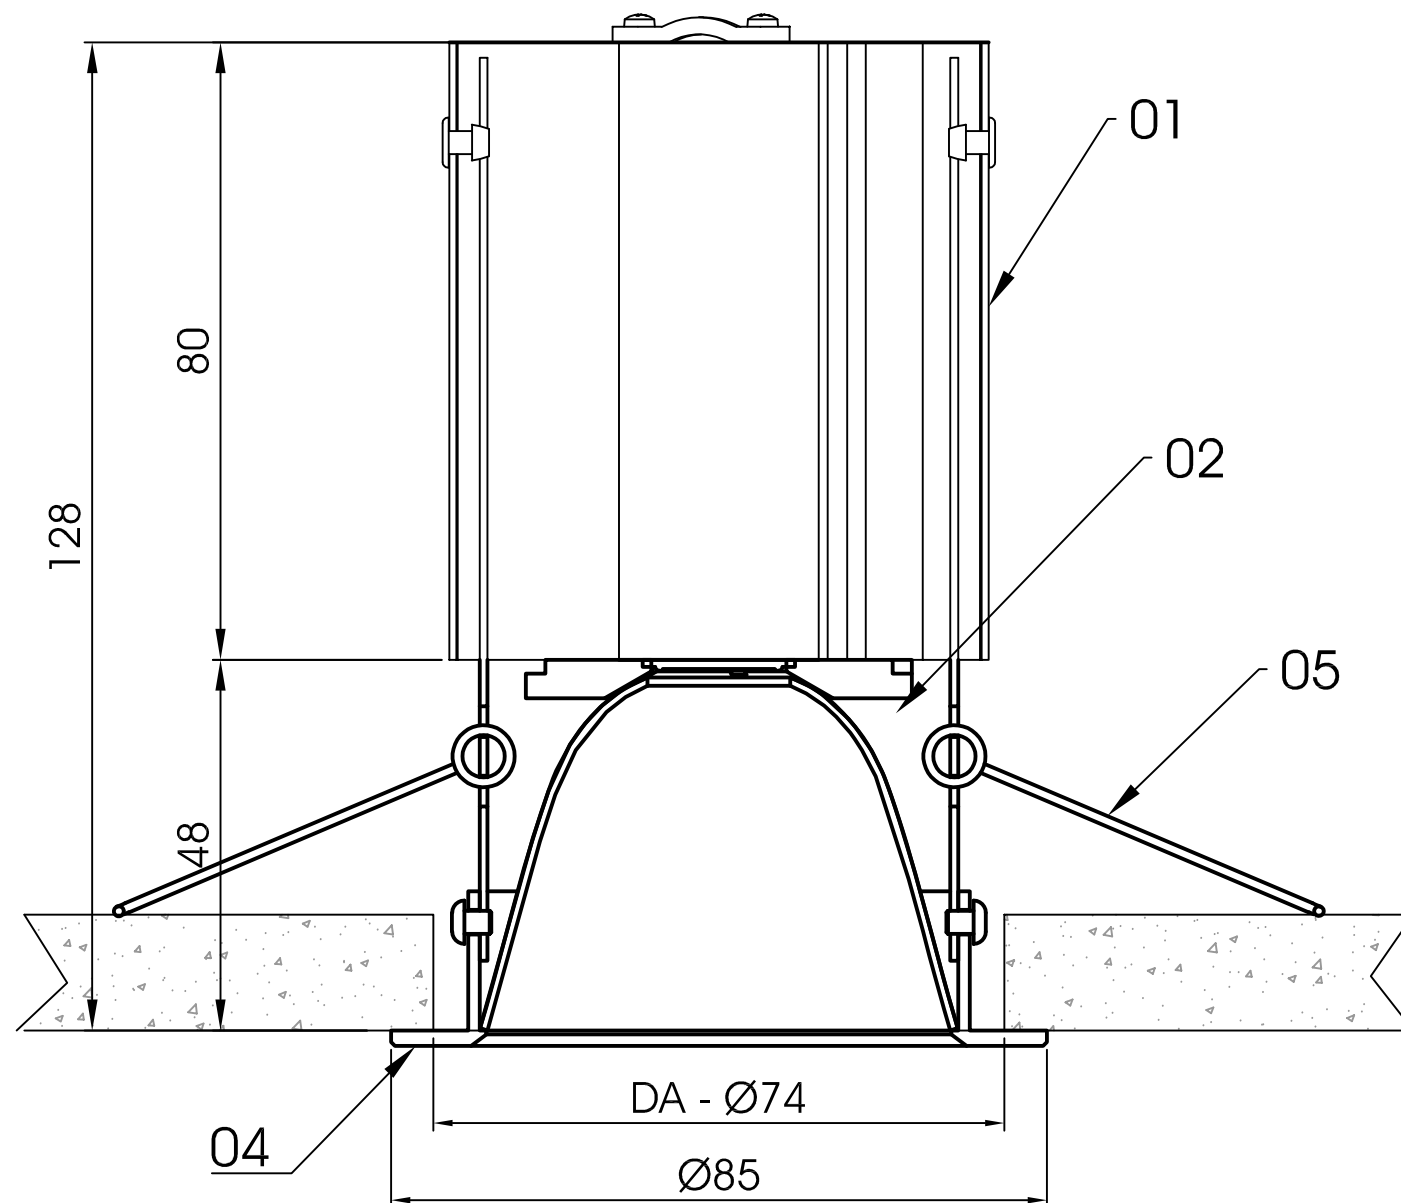


Top-down-view [1:1]:

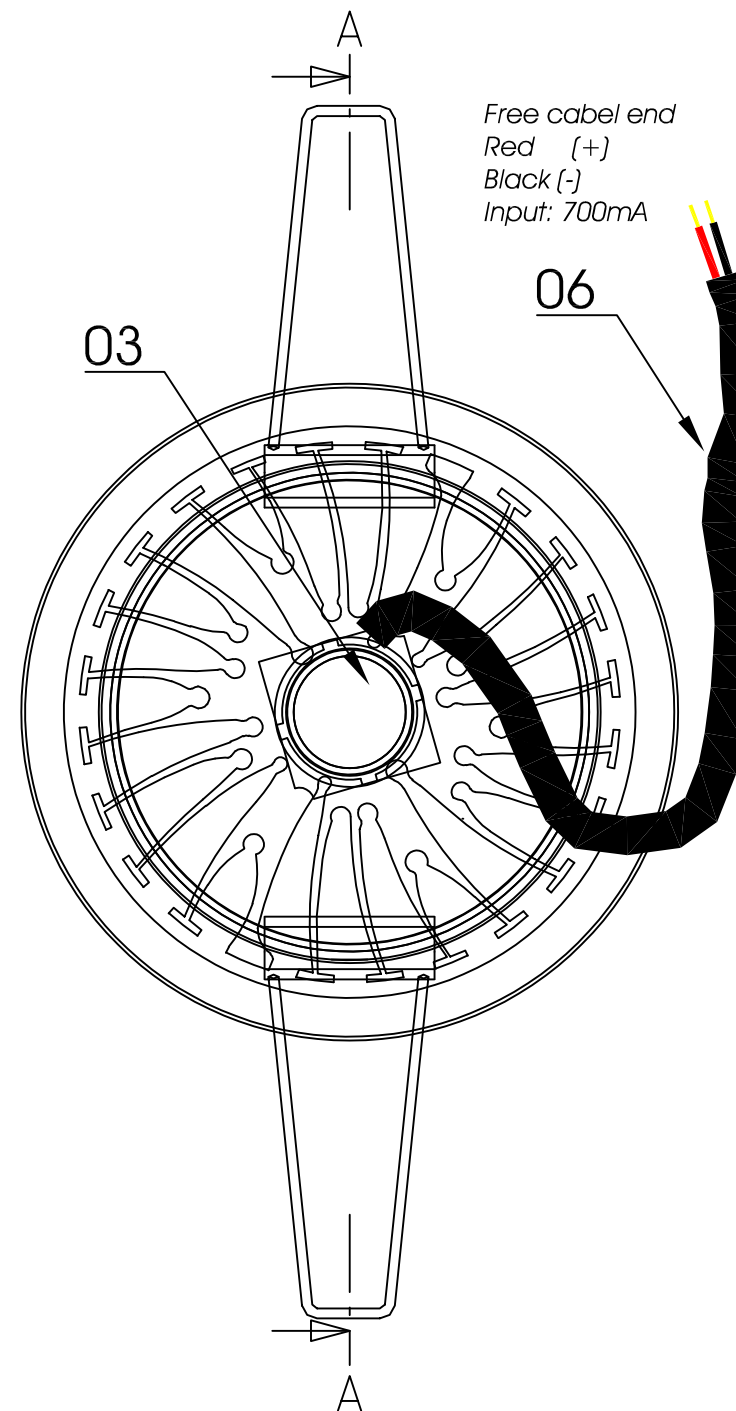

Mounting situation [1:4]:

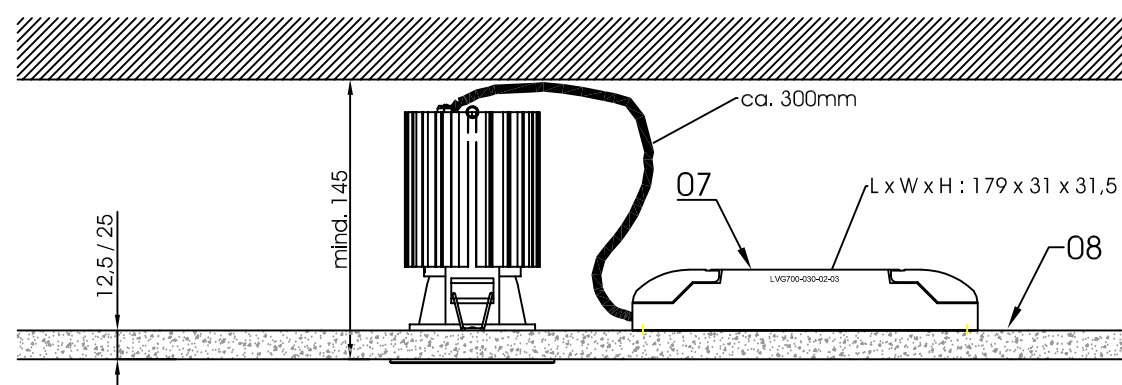

3D-view:

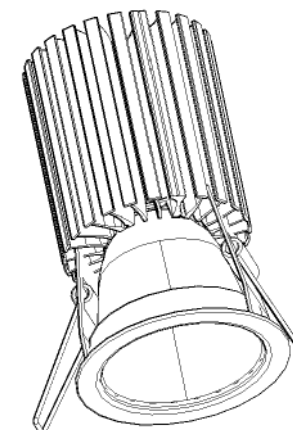

This drawing is passed on with all rights reserved to durlum, and must **ONLY** be used for common purpose projects.

Transmission to third parties especially competitors is prohibited!

durlum GmbH, Schopfheim, Germany

Punteo J085 | for gypsum cardboard

Surface: Aluminium, precision turned  
Light distribution: 2 x 40 ° [1/10]


LED :  
3000 K | 3012 lm | CRI > 80 | ~ 25W | 700 mA | 36V

Dimension Punteo Ø x H [mm]: 85 x 128  
Ceiling cut-out Ø x H [mm]: 74 x 145  
Protection system: IP 20 | Protection class II\*  
Ambient temperature: < 35°C

Electrical connection:  
300 mm with free cable end to be accommodated in the ceiling cavity next to the lamp for connection to LED drivers

\*Standard-driver [separate item]:  
LVG700-030-02-03 - DALI dimmable

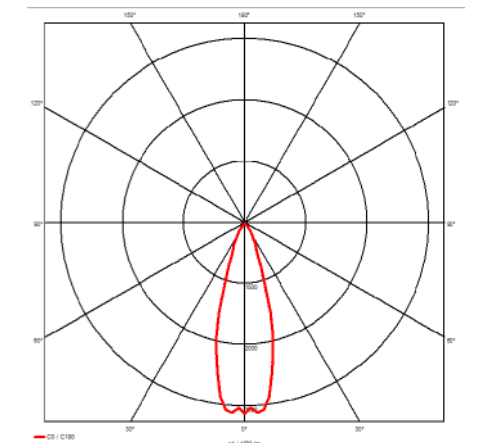

Light distribution curve [ldc]:



01	Heatsink - black
02	Reflector, aluminium highly specular
03	LED-Array
04	Cover ring, aluminium precision turned
05	Mounting springs
06	Cable to LED-driver, L = 300mm
07	LED-driver - DALI dimmable *
08	Plasterboard ceiling

Released for production

Please refer to the general instructions for the operation

 <p>DN ISO 9001 Geprüfte Leistung Qualitätsmanagement Systeme</p>	<p><b>Product : Point - Line - Plane</b> <b>Punteo J085</b> <b>durlum technical documents</b></p>				
<p>Date</p>	<p>Name</p>	<p>Punteo J 085 25 W LED</p>			<p>durlum GmbH An der Wiese 5 79650 Schopfheim Germany</p>
<p>16.04.2015</p>	<p>FB / AF / FF</p>	<p>Pun J085-025-W3-02</p>			<p>E-mail : info@durlum.de Fax : +49 7622 3905-42</p>
<p>A3</p>	<p>Layer</p>	<p>d   2   3   4   5   6   7</p>	<p>F-Pun J085-025-W3-02</p>		